

FRANCE DR2 Ballast Labels

CATALOG NO.
268DR2

120 Volts
60 Hz.

MAX LINE: 1.4 AMPS
OUTPUT: 510 VOLTS
HIGH POWER FACTOR




FRANCE

a Scott Fetzer company
FAIRVIEW, TN 37062
www.franceformer.com 800-753-2753
FLUORESCENT LAMP BALLAST
OUTDOOR TYPE 2

1 OR 2 LAMPS - 4 TO 12 FEET TOTAL
For any 1 OR 2 lamp combination of
800 mA T12 HO rapid start lamps. Total
footage of lamps must not exceed
12 feet nor be less than 4 feet.

DANGER HIGH VOLTAGE
510 OUTPUT VOLTS OPEN CIRCUIT OR 320 VOLTS TO GROUND
DANGER HAUTE TENSION

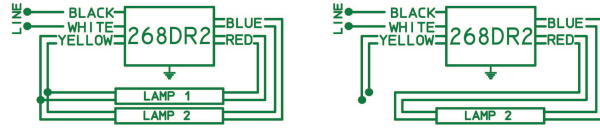

INSULATE EACH UNUSED LEAD FROM GROUND AND ALL OTHER LEADS
Mount lamps within one inch of grounded metal starting aid. Min starting temperature is -20°F (-30°C)
GROUND BALLAST CASE. CAISSE DU TRANSFORMATEUR MIS A TERRE

NO PCB'S
AUTO RESET
THERMALLY PROTECTED
CLASS P
wat12988

CATALOG NO.
448DR2

120 Volts
60 Hz.

MAX LINE: 1.85 AMPS
OUTPUT: 590 VOLTS
HIGH POWER FACTOR




FRANCE

a Scott Fetzer company
FAIRVIEW, TN 37062
www.franceformer.com 800-753-2753
FLUORESCENT LAMP BALLAST
OUTDOOR TYPE 2

2, 3 OR 4 LAMPS - 6 TO 16 FEET TOTAL
For any 2, 3 or 4 lamp combination of
800 mA T12 HO rapid start lamps. Total
footage of lamps must not exceed
16 feet nor be less than 6 feet.

DANGER HIGH VOLTAGE
590 OUTPUT VOLTS OPEN CIRCUIT OR 460 VOLTS TO GROUND
DANGER HAUTE TENSION

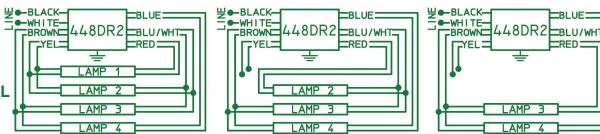

INSULATE EACH UNUSED LEAD FROM GROUND AND ALL OTHER LEADS
Mount lamps within one inch of grounded metal starting aid. Min starting temperature is -20°F (-30°C)
GROUND BALLAST CASE. CAISSE DU TRANSFORMATEUR MIS A TERRE

NO PCB'S
AUTO RESET
THERMALLY PROTECTED
CLASS P
wat12989

CATALOG NO.
468DR2

120 Volts
60 Hz.

MAX LINE: 2.82 AMPS
OUTPUT: 760 VOLTS
HIGH POWER FACTOR




FRANCE

a Scott Fetzer company
FAIRVIEW, TN 37062
www.franceformer.com 800-753-2753
FLUORESCENT LAMP BALLAST
OUTDOOR TYPE 2

2, 3 OR 4 LAMPS - 16 TO 24 FEET TOTAL
For any 2, 3 or 4 lamp combination of
800 mA T12 HO rapid start lamps. Total
footage of lamps must not exceed
24 feet nor be less than 16 feet.

DANGER HIGH VOLTAGE
760 OUTPUT VOLTS OPEN CIRCUIT OR 710 VOLTS TO GROUND
DANGER HAUTE TENSION

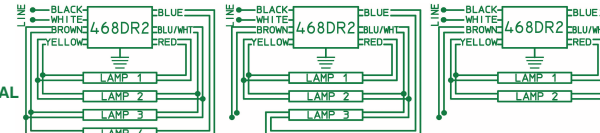

INSULATE EACH UNUSED LEAD FROM GROUND AND ALL OTHER LEADS
Mount lamps within one inch of grounded metal starting aid. Min starting temperature is -20°F (-30°C)
GROUND BALLAST CASE. CAISSE DU TRANSFORMATEUR MIS A TERRE

NO PCB'S
AUTO RESET
THERMALLY PROTECTED
CLASS P
wat12990

CATALOG NO.
488DR2

120 Volts
60 Hz.

MAX LINE: 3.3 AMPS
OUTPUT: 880 VOLTS
HIGH POWER FACTOR




FRANCE

a Scott Fetzer company
FAIRVIEW, TN 37062
www.franceformer.com 800-753-2753
FLUORESCENT LAMP BALLAST
OUTDOOR TYPE 2

3 OR 4 LAMPS - 20 TO 32 FEET TOTAL
For any 3 or 4 lamp combination of
800 mA T12 HO rapid start lamps. Total
footage of lamps must not exceed
32 feet nor be less than 20 feet.

DANGER HIGH VOLTAGE
980 OUTPUT VOLTS OPEN CIRCUIT OR 520 VOLTS TO GROUND
DANGER HAUTE TENSION

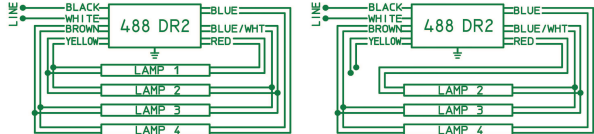

INSULATE EACH UNUSED LEAD FROM GROUND AND ALL OTHER LEADS
Mount lamps within one inch of grounded metal starting aid. Min starting temperature is -20°F (-30°C)
GROUND BALLAST CASE. CAISSE DU TRANSFORMATEUR MIS A TERRE

NO PCB'S
AUTO RESET
THERMALLY PROTECTED
CLASS P
wat12991

CATALOG NO.
668DR2

120 Volts
60 Hz.

MAX LINE: 4.0 AMPS
OUTPUT: 1010 VOLTS
HIGH POWER FACTOR




FRANCE

a Scott Fetzer company
FAIRVIEW, TN 37062
www.franceformer.com 800-753-2753
FLUORESCENT LAMP BALLAST
OUTDOOR TYPE 2

4, 5, OR 6 LAMPS - 24 TO 36 FEET TOTAL
For any 4, 5, or 6 lamp combination of
800 mA T12 HO rapid start lamps. Total
footage of lamps must not exceed
36 feet nor be less than 24 feet.

DANGER HIGH VOLTAGE
1010 OUTPUT VOLTS OPEN CIRCUIT OR 450 VOLTS TO GROUND
DANGER HAUTE TENSION

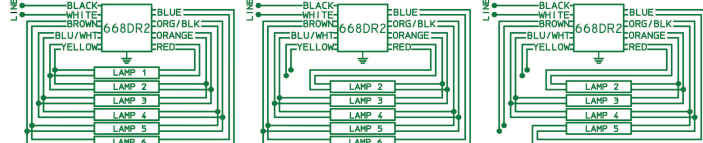

INSULATE EACH UNUSED LEAD FROM GROUND AND ALL OTHER LEADS
Mount lamps within one inch of grounded metal starting aid. Min starting temperature is -20°F (-30°C)
GROUND BALLAST CASE. CAISSE DU TRANSFORMATEUR MIS A TERRE

NO PCB'S
AUTO RESET
THERMALLY PROTECTED
CLASS P
wat12992

CATALOG NO.
688DR2

120 Volts
60 Hz.

MAX LINE: 4.9 AMPS
OUTPUT: 740 VOLTS
HIGH POWER FACTOR




FRANCE

a Scott Fetzer company
FAIRVIEW, TN 37062
www.franceformer.com 800-753-2753
FLUORESCENT LAMP BALLAST
OUTDOOR TYPE 2

4, 5, OR 6 LAMPS - 36 TO 48 FEET TOTAL
For any 4, 5, or 6 lamp combination of
800 mA T12 HO rapid start lamps. Total
footage of lamps must not exceed
48 feet nor be less than 36 feet.

DANGER HIGH VOLTAGE
740 OUTPUT VOLTS OPEN CIRCUIT OR 590 VOLTS TO GROUND
DANGER HAUTE TENSION

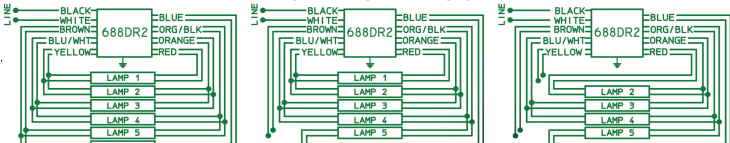

INSULATE EACH UNUSED LEAD FROM GROUND AND ALL OTHER LEADS
Mount lamps within one inch of grounded metal starting aid. Min starting temperature is -20°F (-30°C)
GROUND BALLAST CASE. CAISSE DU TRANSFORMATEUR MIS A TERRE

NO PCB'S
AUTO RESET
THERMALLY PROTECTED
CLASS P
wat12993