


LED POWER SUPPLIES



FRANCE
LIGHTING SOLUTIONS

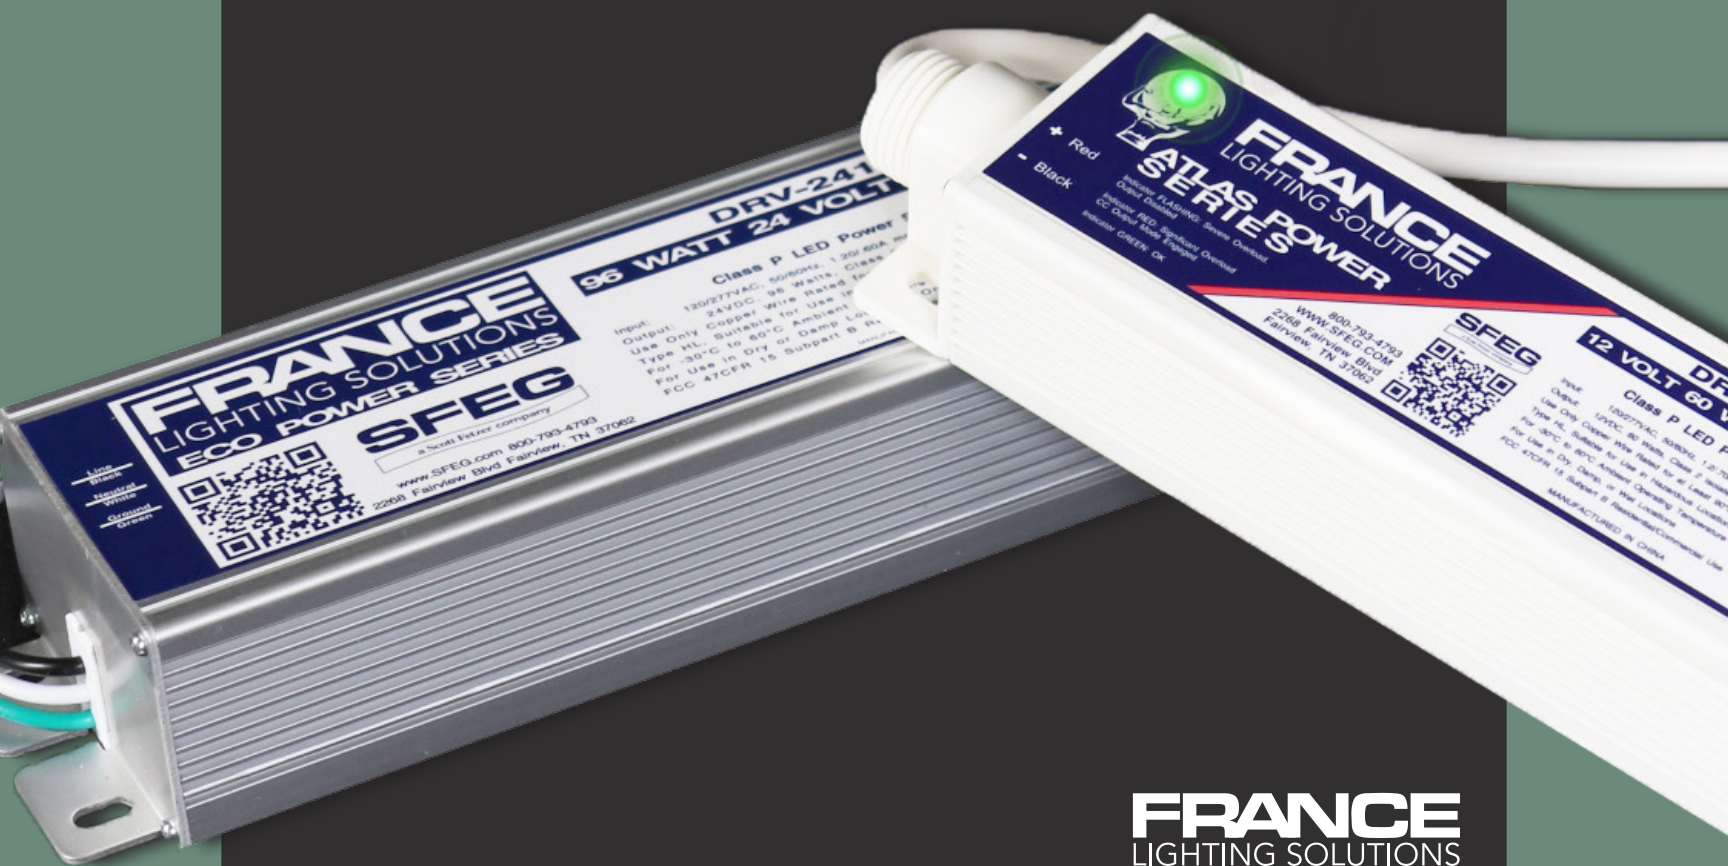

Eco Power Series

No power de-rating required

Supports 100% rated load across the entire operating temperature range.

High electrical efficiency

Enables low energy costs and cool operation in a small package.

Water resistance

IP68, for use in dry or damp applications.

DRV-1230-E

12V, 30W

DRV-2430-E

24V, 30W

DRV-1260-E

12V, 60W

DRV-2460-E

24V, 60W

DRV-24100-E

24V, 96W

DRV-12120-E

12V, 120W



Applications

Use our Power Supplies to light Channel Letters, Feature Flex LED Border Tube, or Display Signs.



Atlas Power Series

Overload LED Indicator Light

Instantly alerts you of an overload or short while power supply enters into protection mode to safeguard against component failure.

No power de-rating required

Supports 100% rated load across the entire operating temperature range.

High electrical efficiency

Enables low energy costs and cool operation in a small package.

Maximum water resistance

IP68 rating and wet-listed conduit fittings. For use in wet, dry or damp applications.

DRV-1260-A

12V, 60W

DRV-2460-A

24V, 60W

DRV-24100-A

24V, 96W

DRV-12120-A


12V, 120W



Save time on sign installations!

Our LED Fast-Pak Kits come pre-assembled and pre-wired for the following models:

DRV-1260-A, DRV-2460-A,
 DRV-24100-A, DRV-24100-E,
 DRV-12120-A, DRV-12120-E,
 and LED-1260WMPs.

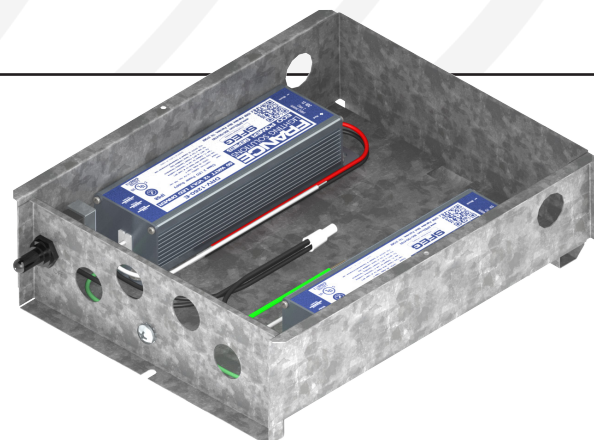

All models share the following specifications:

Short Circuit Protection

UL Listed Class 2 & Class P

120/277 Volt 50/60 Hz Input

Model (Part Number)	Input Current (Amps max)	Input power (W)	Number of Output(s)	Output (VDC)	Output Current (Amps)	Number of Output(s)	Rated Output Power (Watts)	Length (inches)	Width (inches)	Height (inches)	Weight (lbs)	IP Rating	Environment
LED-1260-A (19371)	1.2/.70	75	1	12	5	1	60	8.7	1.97	1.42	2	IP68	Wet-listed
LED-2460-A (19373)	1.2/.70	75	1	24	2.5	1	60	8.7	1.97	1.42	2	IP68	Wet-listed
LED-24100-A* (19375)	1.2/.60	120	1	24	4	1	96	8.98	2.72	1.57	2.5	IP68	Wet-listed
LED-12120-A (19377)	1.7/.70	160	2	12	2x5	2	120	9.69	2.72	1.57	2.9	IP68	Wet-listed
LED-1230-E (19368)	.80/.40	45	1	12	2.5	1	30	6.10	1.77	1.17	.95	IP68	Dry/Damp
LED-2430-E (19369)	.80/.40	45	1	24	1.25	1	30	6.10	1.77	1.17	.95	IP68	Dry/Damp
LED-1260-E (19370)	1.2/.70	75	1	12	5	1	60	7.21	1.97	1.42	2	IP68	Dry/Damp
LED-2460-E (19372)	1.2/.70	73	1	24	2.5	1	60	7.21	1.97	1.42	2	IP68	Dry/Damp
LED-24100-E* (19374)	1.2/.60	120	1	24	4	1	96	8.98	2.72	1.57	2.5	IP68	Dry/Damp
LED-12120-E (19376)	1.7/.70	160	2	12	2x5	2	120	9.69	2.72	1.57	2.9	IP68	Dry/Damp

***High Power Factor**