

FRANCE

LIGHTING SOLUTIONS

P5G-2E

120VAC, 30mA



Standard Outdoor Transformers

Normal Power Factor

ADVANTAGES

Secondary Circuit Ground Fault Protection

Unit is disabled upon detection of arcs to ground in compliance with UL2161, C22.2 No. 255 and NEC requirements.

Bypass Feature for easy troubleshooting of ground faults and primary wiring problems. Overrides the SCGFP for up to 30 minutes.

User Friendly

Adapts to any grounding situation

Diagnostic Circuits

A red LED light indicates the reason for a fault, allowing for quick, easy troubleshooting.

Can be used in flashing/dimming applications.

MODELS

15030 P5G-2E

Secondary Output: 15kV, 30mA

Model Number: 38810

12030 P5G-2E

Secondary Output: 12kV, 30mA

Model Number: 38811

10530 P5G-2E

Secondary Output: 10.5kV, 30mA

Model Number: 38812

9030 P5G-2E

Secondary Output: 9kV, 30mA

Model Number: 38813

7530 P5G-2E

Secondary Output: 7.5kV, 30mA

Model Number: 38814

6030 P5G-2E

Secondary Output: 6kV, 30mA

Model Number: 38815

5030 P5G-2E

Secondary Output: 5kV, 30mA



Model Number: 38816

4030 P5G-2E


Secondary Output: 4kV, 30mA

Model Number: 38817

NORMAL POWER FACTOR													
Catalog Number	VAC	Hz	Secondary		Primary VA	Input Amps	Weight (lbs)	Case Dimensions (inches)					
			Volts	mA				L	W	H	A	B	C
15030 P5G-2E	120	60	15000	30	435	3.60	21	11.25	4.656	5.205	9.203	10.125	3.0
12030 P5G-2E	120	60	12000	30	380	3.15	18	11.25	4.656	5.205	9.203	10.125	3.0
10530 P5G-2E	120	60	10500	30	310	2.55	18	11.25	4.656	5.205	9.203	10.125	3.0
9030 P5G-2E	120	60	9000	30	285	2.35	13	10.00	3.700	4.890	8.375	9.000	2.0
7530 P5G-2E	120	60	7500	30	250	2.10	12	10.00	3.700	4.890	8.375	9.000	2.0
6030 P5G-2E	120	60	6000	30	200	1.65	12	10.00	3.700	4.890	8.375	9.000	2.0
5030 P5G-2E	120	60	5000	30	170	1.40	12	10.00	3.700	4.890	8.375	9.000	2.0
4030 P5G-2E	120	60	4000	30	140	1.15	11	10.00	3.700	4.890	8.375	9.000	2.0

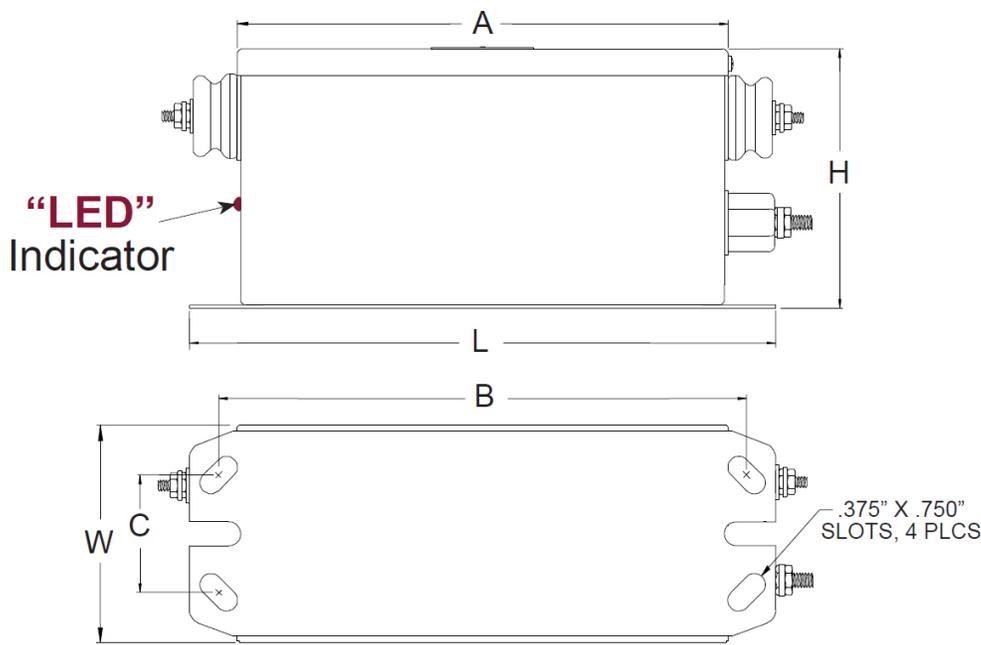

The 9030 P5G-2E & 7530 P5G-2E has horizontal mounting of primary bushing as shown in diagram above.

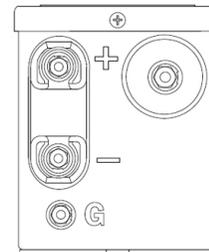

This end view of primary bushing is applicable to all units except the 9030 P5G-2E & 7530 P5G-2E.

- UL does not have listing requirements for transformers that are remotely dimmed or flashed.
- High Power Factor Models may not be dimmed