



**FRANCE**  
LIGHTING SOLUTIONS

**P5G-2E**

**277VAC, 30mA**



## Standard Outdoor Transformers

*Normal Power Factor*

### ADVANTAGES

#### Secondary Circuit Ground Fault Protection

Unit is disabled upon detection of arcs to ground in compliance with UL2161, C22.2 No. 255 and NEC requirements.

**Bypass Feature** for easy troubleshooting of ground faults and primary wiring problems. Overrides the SCGFP for up to 30 minutes.

#### User Friendly

Adapts to any grounding situation

#### Diagnostic Circuits

A red LED light indicates the reason for a fault, allowing for quick, easy troubleshooting.

**Can be used in flashing/dimming applications.**

### MODELS

#### 15030 P5G-2E 277

Secondary Output: 15kV, 30mA

**Model Number: 38797**

#### 12030 P5G-2E 277

Secondary Output: 12kV, 30mA

**Model Number: 38798**

#### 10530 P5G-2E 277

Secondary Output: 10.5kV, 30mA

**Model Number: 38799**

#### 9030 P5G-2E 277

Secondary Output: 9kV, 30mA

**Model Number: 38800**

#### 7530 P5G-2E 277

Secondary Output: 7.5kV, 30mA

**Model Number: 38801**

#### 6030 P5G-2E 277

Secondary Output: 6kV, 30mA

**Model Number: 38802**

#### 5030 P5G-2E 277

Secondary Output: 5kV, 30mA

**Model Number: 38803**



#### 4030 P5G-2E 277

Secondary Output: 4kV, 30mA


**Model Number: 38804**

NORMAL POWER FACTOR

Catalog Number	VAC	Hz	Secondary		Primary VA	Input Amps	Weight (lbs)	Case Dimensions (inches)					
			Volts	mA				L	W	H	A	B	C
15030 P5G-2E 277	277	60	15000	30	425	1.55	21	11.25	4.656	5.205	9.203	10.125	3.0
12030 P5G-2E 277	277	60	12000	30	385	1.40	19	11.25	4.656	5.205	9.203	10.125	3.0
10530 P5G-2E 277	277	60	10500	30	310	1.15	19	11.25	4.656	5.205	9.203	10.125	3.0
9030 P5G-2E 277	277	60	9000	30	275	1.00	13	10.00	3.700	4.890	8.375	9.000	2.0
7530 P5G-2E 277	277	60	7500	30	235	.85	12	10.00	3.700	4.890	8.375	9.000	2.0
6030 P5G-2E 277	277	60	6000	30	190	.70	12	10.00	3.700	4.890	8.375	9.000	2.0
5030 P5G-2E 277	277	60	5000	30	160	.60	12	10.00	3.700	4.890	8.375	9.000	2.0
4030 P5G-2E 277	277	60	4000	30	130	.50	11	10.00	3.700	4.890	8.375	9.000	2.0

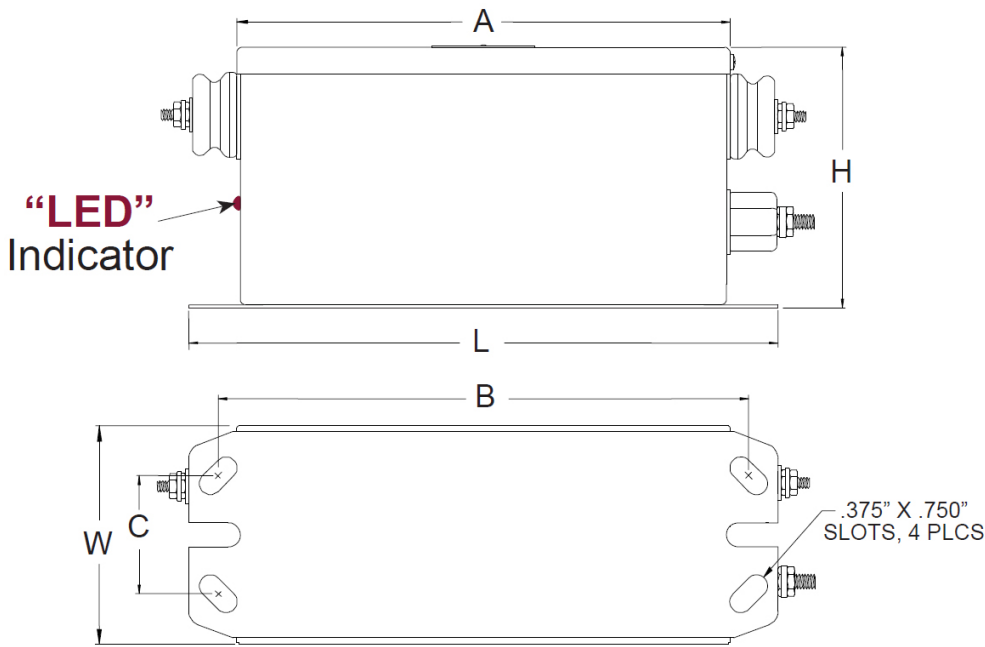

The 9030 P5G-2E & 7530 P5G-2E has horizontal mounting of primary bushing as shown in diagram above.



This end view of primary bushing is applicable to all units except the 9030 P5G-2E & 7530 P5G-2E.

- UL does not have listing requirements for transformers that are remotely dimmed or flashed.
- High Power Factor Models may not be dimmed