



Self-Enclosed Transformer

ADVANTAGES

True 30mA & 60mA Output

The ServiceMaster can replace 8 ratings.

Diagnostic Circuit

LED Indicates the reason for service, allowing for quick, easy troubleshooting.

Primary Wiring Requirements of a Non-SCGFP

with the added safety of Secondary Circuit Ground Fault Protection.

Secondary Circuit Ground Fault Protection

Unit is disabled upon detection of arcs to ground in compliance with UL2161, C22.2 No. 255 and NEC requirements.

Service Button overrides the SCGFP for up to 30 minutes or easy troubleshooting of ground faults and primary wiring problems.

Auto Reset three times within ten seconds after secondary ground fault. Manual reset possible at any time.

Easy wiring and mounting

Step Plate eliminates double-nutting. Adapts to most grounding situations. Virtual Ground and Series Wiring Methods.

FRANCE
LIGHTING SOLUTIONS

P5KA2NG-2E

120V, 30mA



MODELS

15030 P5KA2NG-2E

Secondary Output: 15kV, 30mA

Model Number: 38867

12030 P5KA2NG-2E

Secondary Output: 12kV, 30mA

Model Number: 38868

10530 P5KA2NG-2E

Secondary Output: 10.5kV, 30mA

Model Number: 38869

9030 P5KA2NG-2E

Secondary Output: 9kV, 30mA

Model Number: 38870

7530 P5KA2NG-2E

Secondary Output: 7.5kV, 30mA

Model Number: 38871

6030 P5KA2NG-2E

Secondary Output: 6kV, 30mA

Model Number: 38872

5030 P5KA2NG-2E

Secondary Output: 5kV, 30mA


Model Number: 38873

4030 P5KA2NG-2E

Secondary Output: 4kV, 30mA

Model Number: 38874

NORMAL POWER FACTOR													
Catalog Number	VAC	Hz	Secondary		Primary VA	Input Amps	Weight (lbs)	Case Dimensions (inches)					
			Volts	mA				L	W	H	A	B	C
15030 P5KA2NG-2E	120	60	15000	30	435	3.60	25	13.35	4.50	7.42	10.87	12.21	3.0
12030 P5KA2NG-2E	120	60	12000	30	380	3.15	23	13.35	4.50	7.42	10.87	12.21	3.0
10530 P5KA2NG-2E	120	60	10530	30	310	2.55	23	13.35	4.50	7.42	10.87	12.21	3.0
9030 P5KA2NG-2E	120	60	9000	30	285	2.35	19	13.35	4.50	7.42	10.87	12.21	3.0
7530 P5KA2NG-2E	120	60	7500	30	250	2.10	17	13.35	4.00	6.13	10.87	12.21	3.0
6030 P5KA2NG-2E	120	60	6000	30	200	1.65	16	13.35	4.00	6.13	10.87	12.21	3.0
5030 P5KA2NG-2E	120	60	5000	30	170	1.40	16	13.35	4.00	6.13	10.87	12.21	3.0
4030 P5KA2NG-2E	120	60	4000	30	140	1.15	15	13.35	4.00	6.13	10.87	12.21	3.0

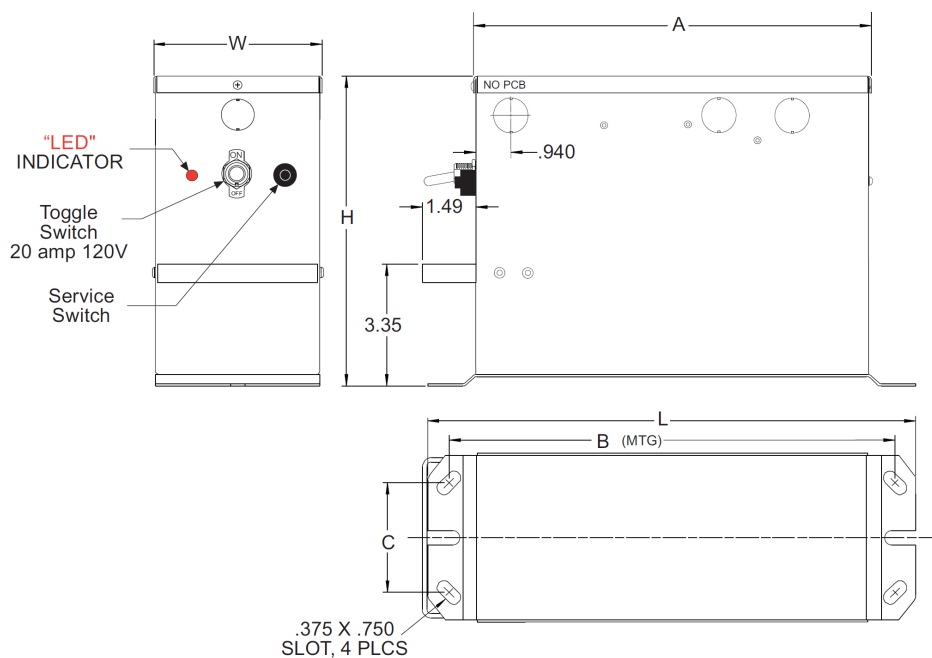

DIAGNOSTIC LED FAULT CODES	
LED Fault Code	Indicates
Steady On	Operating normally
Continuous Flashing	Service mode
1- Flash	15 second Diagnostic and Auto Reset Mode
2- Flash	Secondary Ground Fault with service ground connected
3- Flash	Secondary Ground Fault when service ground not connected
4- Flash	Input Voltage exceeds 120% of rated
5- Flash	Line & Neutral reversed on input connections