When it has to work... EVERY TIME.
Count on **Atlas Power Supplies.**

Featuring an LED Status Indicator that instantly alerts you of an overload or short.

WET-LISTED 96W 24V CLASS 2 LED POWER SUPPLY

No power de-rating required
Supports 100% 96W load across the entire operating temperature range. Light more LEDs with less power supplies, creating cost savings.

High electrical efficiency
Enables low energy costs and cool operation in a small package. Features an 85°C maximum case temperature. High Power Factor.

Maximum water resistance
IP68 rating and wet-listed conduit fittings. Can be used outside an enclosure. Low profile aluminum case and fully potted.

DRV-24100-A

Overload indicator light makes installation quick & easy!

For more information, contact your France distributor or email us at sales@sfeg.com

FRANCE
LIGHTING SOLUTIONS

800.793.4793   www.sfeg.com   2268 Fairview Blvd, Fairview, TN 37062

C(UL)US **LISTED** **E468013**

IP68

✓ RoHS

Size
8.90" Long x 2.72" Wide x 1.57" Tall
Including Baseplate & Conduit Fittings,
2.5 pounds.

Ambient Operating Temperature
-30°C to 60°C

Input
120/277VAC, 50/60Hz,
1.2/.60A max, >.90 PF

Output
24VDC, 4 Amp, 96 Watt, Class 2
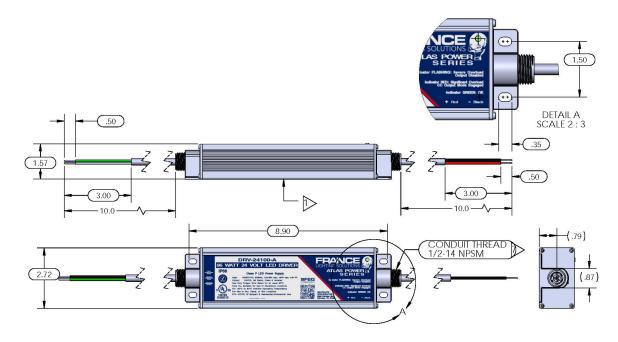No Minimum Loading Requirement

Lead Length
10" RTJW Input and Output

Environment
IP68, For Use in Dry, Damp, or Wet
Locations
UL Listed Class P
FCC 47CFR 15 Subpart B Residential
or Commercial Use

Warranties
5 Year France LED Parts Warranty
1 Year Labor Warranty